




| | |
|-----------------------------------|---------------------|
| Working Height Max. | 7.8 m (25'7") |
| Overall Lift Capacity Max. | 230 kg (507 lb) |
| Overall Width | 0.81 m (2'8") |
| Overall Length | 1.86 m (6'1") |
| Overall Weight | 1,540 kg (3,395 lb) |

LS0608E

**Electric Scissor
Lift E-Drive**

LS0608E SPECIFICATIONS >>>

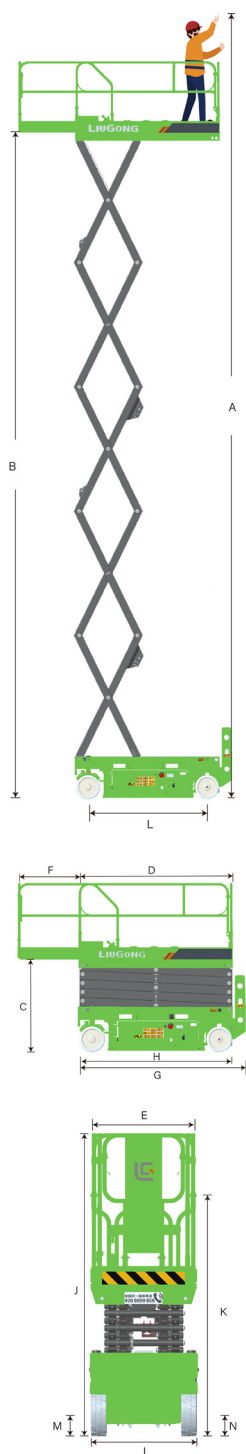

DIMENSIONS

| | |
|--|---------------|
| A. Working Height Max. | 7.8 m (25'7") |
| B. Platform Height Max. | 5.8 m (19') |
| C. Platform Height (Stowed) | 1 m (3'3") |
| D. Platform Length | 1.64 m (5'5") |
| E. Platform Width | 0.75 m (2'6") |
| F. Extension Deck (Roll Out) | 0.9 m (2'11") |
| G. Overall Length | 1.86 m (6'1") |
| H. Overall Length (Without Ladder) | 1.72 m (5'8") |
| I. Overall Width | 0.81 m (2'8") |
| J. Stowed Height (Rails Up) | 2.17 m (7'1") |
| K. Stowed Height (Rails Down) | 1.73 m (5'8") |
| L. Wheelbase | 1.37 m (4'6") |
| M. Ground Clearance (Pothole Raised) | 85 mm (3") |
| N. Ground Clearance (Pothole Deployed) | 18 mm (0.7") |

PRODUCTIVITY

| | |
|--|----------------------------|
| Overall Lift Capacity Max. | 230 kg (507 lb) |
| Extension Deck Capacity | 113 kg (249 lb) |
| Platform Occupancy Max. (Indoor/Outdoor) | 2 / 1 |
| Drive Speed (Stowed) | 2 km/h (1.24 mph) |
| Drive Speed (Raised) | 0.3 km/h (0.19 mph) |
| Turning Radius (Inside/Outside) | 0.3 / 1.78 m (11" / 5'10") |
| Lift/Lower Time | 25 / 22 s |
| Gradeability | 25 % |
| Tilt Sensor Activation | X 1.5° / Y 3° |
| Tire Size (Solid Non-marking) | 356 x 114 mm (1'2" x 4") |

POWER

| | |
|----------------------------|-----------------|
| Battery | 24 V / 225 Ah |
| Lithium Battery (Optional) | 24 V / 105 Ah |
| Charger | 24 V / 30 A |
| Lift Motor | 24 V / 3.3 kW |
| Drive Motor | 24 V / 0.6 kW |
| Hydraulic System Volume | 8 L (2 gal) |
| Hydraulic Tank Capacity | 6 L (1 gal 5pt) |

WEIGHT

| | |
|----------------|---------------------|
| Overall Weight | 1,540 kg (3,395 lb) |
|----------------|---------------------|

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China

T: +86 772 3886124

E: overseas@liugong.com

www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area.

10/2024 Designed by LiuGong