






<b>Working Height Max.</b>	7.8 m (25'7")
<b>Overall Lift Capacity Max.</b>	230 kg (507 lb)
<b>Battery</b>	24 V / 225 Ah
<b>Lift Motor</b>	3.3 kW
<b>Overall Weight</b>	1,800 kg (3,968 lb) 1,740 kg (3,836 lb)

## **LS0610EC**

# **Crawler Scissor Lift**

# **E-Drive**

# LS0610EC SPECIFICATIONS >>>

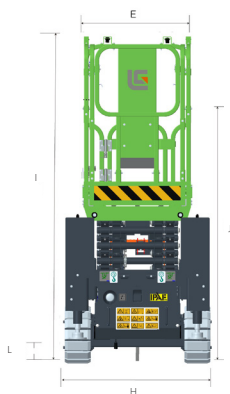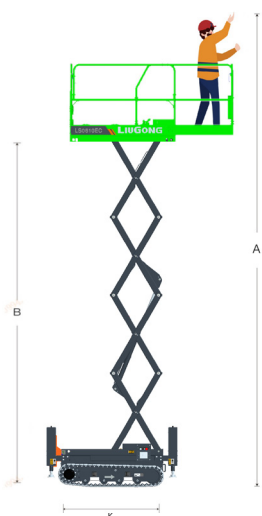

## DIMENSIONS

A. Working Height Max.	7.8 m (25'7")
B. Platform Height Max.	5.8 m (19')
C. Platform Height (Stowed)	1.09 m (3'6")
D. Platform Length	1.64 m (5'5")
E. Platform Width	0.75 m (2'6")
F. Extension Deck (Roll Out)	0.9 m (2'11")
G. Overall Length	2.2 m (7'2")
H. Overall Width	1.01 m (3'4")
I. Stowed Height (Rails Up)	2.21 m (7'3")
J. Stowed Height (Rails Down)	1.78 m (5'10")
K. Wheelbase	1.42 m (4'7")
L. Ground Clearance	0.11 m (4.3")

## PRODUCTIVITY

Overall Lift Capacity	230 kg (507 lb)
Extension Deck Capacity	120 kg (264 lb)
Platform Occupancy Max. (Indoor/Outdoor)	2 / 1
Drive speed (Stowed)	2 km/h (1.2 mph)
Lift/Lower Time	25 / 22 s
Gradeability	30 %
Tilt Sensor Activation	X 2° / Y 3°
Outrigger Leveling Angle	X 7° / Y 16°
Crawler	180 x 72 x 54 mm (7" x 2.8" x 2")

## POWER

Battery	24 V / 225 Ah
Charger	24 V / 30 A
Lift Motor	3.3 kW
Drive Motor	1.5 kW

## WEIGHT

Overall Weight	Metal Track 1,800 kg (3,968 lb) Rubber Track 1,740 kg (3,836 lb)
----------------	---

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China  
T: +86 772 3886124 E: overseas@liugong.com  
www.liugong.com

06/2025 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.